

**Wavesys**  
**Industrial Grade Switch**

## WSI90W-0602-SFP-Extd

6-Port Industrial Gigabit IEEE 802.3bt PoE+ Managed Ethernet Switch

-4\*10/100/1000Base-T(X) with bt PoE-PSE (90W/Port) +  
2\*100/1000Base-(F)X SFP Slots



**About the Switch:** Wavesys's WSI90W-0602-SFP-Extd is a 6-port full gigabit managed PoE Ethernet switch, which provides 4\*10/100/1000Base-T(X) with IEEE 802.3 bt PoE compliant and 2\*100/1000Base-(F)X SFP slots. WSI90W-0602-SFP-Extd Series is a full manageable Layer-2 Ethernet switch series and supports power inputs redundancy and PoE function with 90W per port output. WSI90W-0602-SFP-Extd offers standardized network redundancy ITU-T G.8032 ERPS v2 (Ethernet Ring Protection Switch) protocol, providing <50ms recovery time to the network, to give user the chance to choose your Ethernet switch but not tied up with particular brand's product.

WSI90W-0602-SFP-Extd Series as an industrial Ethernet switch product line, is designed to withstand harsh and extreme environment conditions. With fan-less design, WSI90W-0602-SFP-Extd series still manages to be applied in extremely polarized temperature, from -40°C to 75°C, making it the best choice in various industrial applications.

## Key Features

- 4-port 10/100/1000Base-T(X) Ethernet with IEEE 802.3af/at/bt compliant PoE, 90W/port
- 2-port dual rate 100/1000Base-(F)X SFP slots
- Persistent PoE, Safe PoE Disable, PoE ping alive
- Multiusers account for security
- Configuration: http, https, CLI Command, Telnet, SNMP,SSH
- Network redundancy support: G.8032 ERPS v2/ STP/ RSTP/ MSTP
- Supports IP route for routing function
- Supports RADIUS, TACACS+ authentication protocol
- Supports QoS, LACP bandwidth control
- Supports VLAN, SNMP v1/v2c/v3, ACL, IP source guard for Ethernet security
- PoE ping alarm function for PoE ports power recycle
- Redundant power inputs design
- Operating temperature range - STD: -10°C ~ 65°C, Extd: -40°C ~ 75°C

# Specification

## Technology

|           |   |
|-----------|---|
| Standards | IEEE 802.3 10Base-T Ethernet<br>IEEE 802.3u 100Base-TX Fast Ethernet<br>IEEE 802.3ab 1000Base-T<br>IEEE 802.3z 1000Base-X Gigabit Fiber<br>IEEE 802.3af/at Power over Ethernet<br>IEEE 802.3x Flow Control<br>IEEE 802.1d STP (Spanning Tree Protocol)<br>IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)<br>IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)<br>ITU-T G.8032 / Y.1344 ERPS v1/v2(Ethernet Ring Protection Switch)<br>IEEE 802.1Q Virtual Local Area Network (VLAN)<br>IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization<br>IEEE 802.1X Network Authentication<br>IEEE 802.1AB Link Layer Discovery Protocol (LLDP)<br>IEEE 802.3ad Link Aggregation (LACP) |
|-----------|---|

|                 |                   |
|-----------------|-------------------|
| Processing Type | Store and Forward |
|-----------------|-------------------|

|              |  |
|--------------|--|
| Flow Control | IEEE 802.3x flow control, back pressure flow control |
|--------------|--|

## Network Management

|            |  |
|------------|--|
| Management | IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone /Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power lost warning, relay trigger |
|------------|--|

|          |  |
|----------|--|
| Security | Port-based/Single/Multi 802.1X, ACL(Port/Rate Limiters/ACE), MAC-based Authentication, VLAN assignment, QoS Assignment, Private VLAN, Guest VLAN, RADIUS accounting, TACACS+, IP MAC binding, WEB/CLI authentication, Authorization (15 levels), Port Security Limit Control, ACLs for filtering/policing/port copy, IP source guard, ARP Inspection |
|----------|--|

|              |   |
|--------------|---|
| L2 Switching | Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMPv2 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2 |
|--------------|---|

|              |                              |
|--------------|------------------------------|
| L3 Switching | DHCP option82, static routes |
|--------------|------------------------------|

|     |   |
|-----|---|
| QoS | 802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode |
|-----|---|

|              |  |
|--------------|--|
| Power Saving | ActiPHY, PerfectReach, IEEE 802.3az EEE power management |
|--------------|--|



|                      |  |
|----------------------|--|
| Network Redundancy   | STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)  |
| Configuration        | Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3   |
| PoE                  | POE/POE+ port power allocation, Power budget protection, PoE output scheduled, PoE alive check and remote reboot PD device |
| System / Diagnostics | Dual Image Protection, PING, PING6   |

### SNMP MIBs & RFC Standards

RFC 2674 VLAN MIB  
 IEEE-802.1Q bridge MIB 2008  
 RFC 2819 RMON (group 1, 2, 3, and 9)  
 RFC 1213 MIB II  
 RFC 1215 TRAPS  
 RFC 4188 bridge  
 RFC 4292 IP forwarding table  
 RFC 4293 management information base for the Internet Protocol (IP)  
 RFC 5519 multicast group membership discovery  
 RFC 4668 RADIUS auth. client  
 RFC 4670 RADIUS accounting  
 RFC 3635 Ethernet-like  
 RFC 2863 interface group MIB using SMI v2  
 RFC 3636 802.3 MAU  
 RFC 4133 entity MIB v3  
 RFC 3411 SNMP management frameworks  
 RFC 3414 user-based security model for SNMPv3  
 RFC 3415 view-based access control model for SNMP  
 RFC 2613 SMON – PortCopy  
 IEEE 802.1 MSTP  
 IEEE 802.1AB LLDP-MIB (LLDP MIB included in a clause of the STD)  
 IEEE 802.3ad (LACP MIB included in a clause of the STD)  
 IEEE 802.1X (PAE MIB included in a clause of the STD)  
 TIA 1057 LLDP-MED ( MIB is part of the STD)  
 RFC 3621 LLDP-MED Power (POE) (No specific MIB for POE+ exists)

### Switch Properties

(Back-Plane) 12Gbps

Priority Queues 8

Max. Number of VLANs 4095

VLAN ID Range VID 1 to 4095

Memory Buffer 4Mbits

Jumbo Frame 9.6Kbytes

MAC Table Size 8K

IGMP Group 1024

|               |  |
|---------------|--|
| Transfer Rate | 14,880pps for Ethernet port<br>148,800pps for Fast Ethernet port<br>1,488,000pps for Gigabit Ethernet port |
|---------------|--|

## Interface

|                                    |  |
|------------------------------------|--|
| Rj45 Ports                         | 4*10/100/1000 Base-T(X) with bt PoE-PSE (90W/Port) Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X  |
| PoE Pin Out                        | V-, V-, V+, V+, for pin 1, 2, 3, 6; V+, V+, V-, V-, for pin 4, 5, 7, 8<br>*Support Modes: Mode A, Mode B, 4-Pair Mode  |
| Fiber Port                         | 2*100/1000Base-(F)X SFP slots  |
| Wavelength                         | Depends on SFP modules   |
| LED Indicators                     | System: Power 1, Power 2, Master, Ring, Status Ethernet ports: Speed/Link/Active<br>PoE: On-connected to PD devices SFP: Link/Active<br>PoE Load: 50%, 70%, 90%  |
| Rs232 Serial Console               | Provided one Mini USB B type connector for RS-232 serial signal transmission   |
| Relay Contact                      | 24 VDC, 1A resistive   |
| Configuration Backup Relay Contact | Provided one Mini USB B type connector for RS-232 serial signal transmission   |
| Network Cable                      | 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)<br>100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)<br>1000Base-TX: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m) |
| Optical Cable                      | Multi-mode cable - 50/125um or 62.5/125um,<br>Single-mode cable - 9/125um or 10/125um  |

## Power Requirements

|                             |   |
|-----------------------------|---|
| Input Voltage               | Dual 48-55VDC redundant power inputs<br>* For IEEE802.3 bt application, power supply not less than 53V is recommended |
| Power Connection            | 1*removable 6-contact terminal block  |
| Overload Current Protection | Present (Slow-Blow Fuse)  |
| Reverse Polarity Protection | Present   |
| System Power Consumption    | Max. 10.8W full loading   |
| Max. PoE Power Budget       | 240W@48-55VDC   |
| PoE Power Output            | 90W max. per PoE port   |

## Mechanical Characteristics

|                           |  |
|---------------------------|--|
| Housing                   | Metal, IP40 protection   |
| Dimensions<br>(W x H x D) | 64.9 x 110 x 89.8 mm ( 2.6x 4.3 x 3.5 inch)                            |
| Weight                    | Unit weight: 0.948 kg ( 2.08 lb), Shipping weight: 1.224 kg ( 2.69 lb) |
| Mounting                  | DIN-Rail Mounting,<br>Wall Mounting                                    |

## Environmental Limits

|                           |  |
|---------------------------|--|
| Operating Temperature     | STD: -10°C ~ 65°C (14°F ~ 149°F)<br>Extd: -40°C ~ 75°C (-40°F ~ 167°F) |
| Storage Temperature       | -40°C ~ 85°C (-40°F ~ 185°F)   |
| Ambient Relative Humidity | 5 to 95%, (non-condensing)   |

## Regulatory Approvals

|  |  |
|--|--|
| EMI  | FCC Part 15 Subpart B Class A,<br>CE EN55032/EN61000-6-4 Class A   |
| EMS  | CE EN55035/EN61000-6-2 Class A:<br>IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT),<br>IEC61000-4-5 (Surge), IEC61000-4-6 (CS),<br>IEC61000-4-8 (Magnetic Field) |
| Free Fall                                  | IEC60068-2-32  |
| Shock                                      | IEC60068-2-27  |
| Vibration                                  | IEC60068-2-6   |
| Green                                      | RoHS Compliant   |
| Safety                                     | UL61010-1, UL61010-2-201   |
| MTBF (Telcordia SR-332, Issue 3, GB, 25°C) | 530,230 hrs.<br>WSI90W-0602-SFP-Extd Series: 271,943 hrs.  |
| Warranty                                   | 5 Years  |

NOTE: Due to continuous improvement, all product specifications are subject to change without further notice.

## Optional Accessories - Power Supply Series

### 30W Power Supply Series

WHDR-30-24 36W Industrial DIN-Rail Power Supply, 24VDC/1.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -30°C ~ 70°C

### 60W Power Supply Series

WHDR-60-24 60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 88-264VAC/124-370VDC power input, Plastic, -30°C ~ 70°C

WMDR-60-24 60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -20°C ~ 70°C

### 75W Power Supply Series

WEDR-75-48 75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C

WNDR-75-48 75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

### 120W Power Supply Series

WEDR-120-48 120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C

WNDR-120-24 120W Industrial DIN-Rail Power Supply, 24VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

WNDR-120-48 120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

### 240W Power Supply Series

WNDR-240-48 240W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

WSDR-240-24 240W Industrial DIN-Rail Power Supply w/ PFC, 24VDC/10A, Universal 88-264VAC/124-370VDC power input, Metal, -25°C ~ 70°C

### 480W Power Supply Series

WNDR-480-48 480W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/10A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C

# OPTIONAL ACCESSORIES - SFP Transceiver Series

## 100Mbps Multi-mode SFP Transceiver Modules Series

WSFP-TM02 100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C

WSFP-TM02-T 100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C

## 100Mbps Single-mode SFP Transceiver Modules Series

WSFP-TS20-WA 100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C

WSFP-TS20-WA-T100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C

WSFP-TS20-WB100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C

WSFP-TS20-WB-T100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C

WSFP-TS30100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, 0°C ~ 70°C

WSFP-TS30-T100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, -40°C ~ 85°C

## 1Gbps Multi-mode SFP Transceiver Modules Series

WSFP-GM00 1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, 0°C ~ 70°C

WSFP-GM00-T 1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, -40°C ~ 85°C

WSFP-GM02 1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C

WSFP-GM02-T 1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C

## 100Mbps Single-mode SFP Transceiver Modules Series

WSFP-GS10 1Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, 0°C ~ 70°C

WSFP-GS10-T1 Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, -40°C ~ 85°C

WSFP-GS10-WA 1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C

WSFP-GS10-WA-T 1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C

WSFP-GS10-WB 1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C

WSFP-GS10-WB-T 1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C

WSFP-GS20 1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, 0°C ~ 70°C

WSFP-GS20-T 1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, -40°C ~ 85°C

WSFP-GS40 1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, 0°C ~ 70°C

WSFP-GS40-T 1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, -40°C ~ 85°C

WSFP-GS40-WA 1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C

WSFP-GS40-WB 1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C




|              |   |
|--------------|---|
| WSFP-GS60    | 1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, 0°C ~ 70°C                     |
| WSFP-GS60-T  | 1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, -40°C ~ 85°C                   |
| WSFP-GS60-WA | 1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C |
| WSFP-GS60-WB | 1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C |
| WSFP-GS80    | 1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, 0°C ~ 70°C                     |
| WSFP-GS80-T  | 1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, -40°C ~ 85°C                   |
| WSFP-GSH2    | 1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, 0°C ~ 70°C                    |
| WSFP-GSH2-T  | 1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, -40°C ~ 85°C                  |

### 100Mbps Single-mode SFP Transceiver Modules Series

|              |   |
|--------------|---|
| WSFP-GC00-SG | SFP to 10/100/1000Base-T(X) copper Module, 0°C ~ 70°C |
| WSFP-GC00-SE | SFP to 1000Base-T copper Module, 0°C ~ 70°C           |

#### Dimension

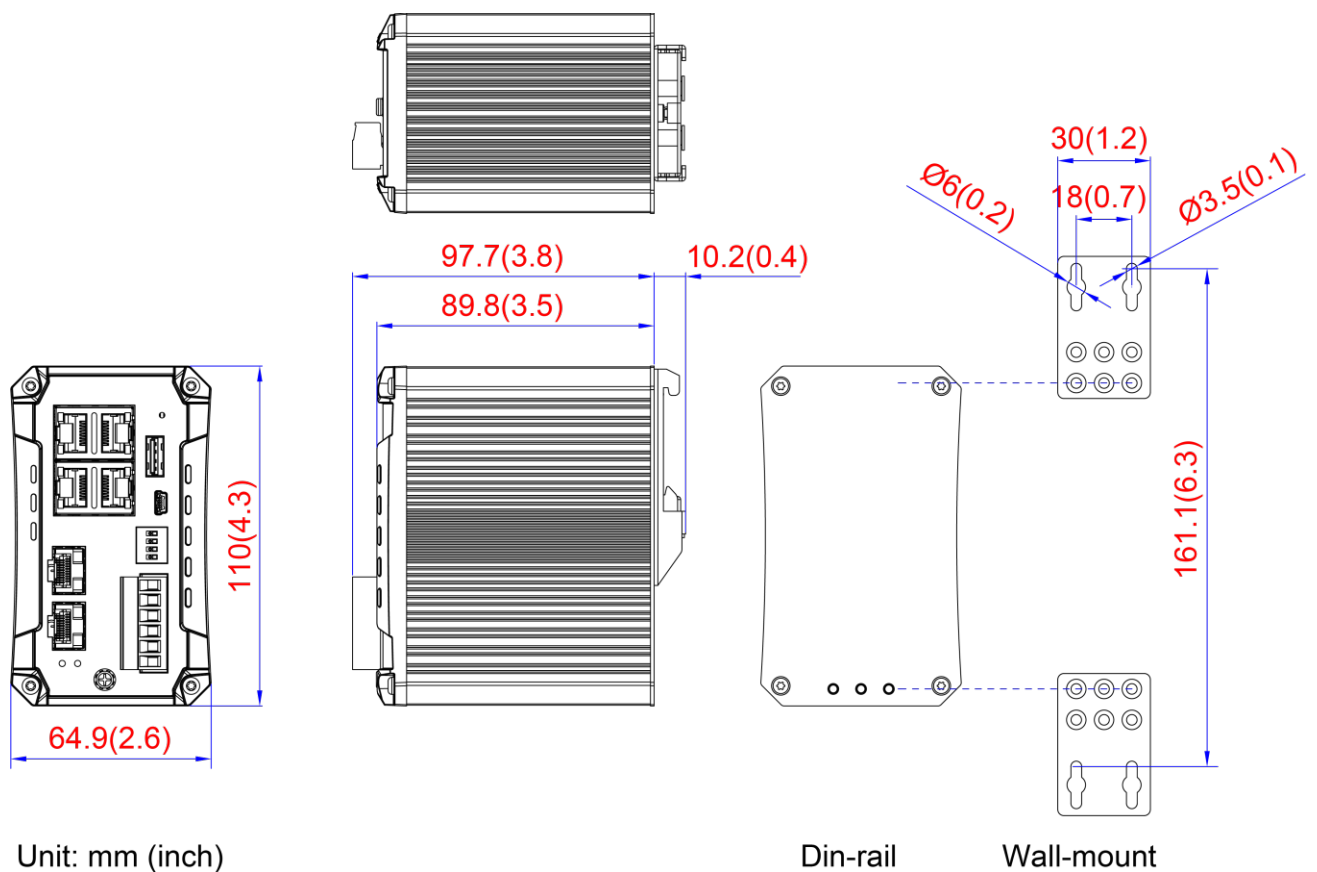

# Easily Connect & Power Up for Your High-Power PoE Networks

PoE (Power over Ethernet) technology is widely adopted for supporting networking devices power and connectivity when facing the challenge of wiring in rigorous environments with power sourcing limitations. IEEE standards specify the maximum power output from PSE (power sourcing equipment) as well as the power budget for the PD (powered device) to ensure the interoperability of both devices in the market. With the increasing need of higher power in applications, the maximum PD power available is increased by this amendment to IEEE standards.

## IEEE 802.3af

Power Sourced  
15.4W

Power Requested  
13W



IP Camera



IP Phone

## IEEE 802.3at

Power Sourced  
30W

Power Requested  
25.5W



Wireless AP



IP Camera

## IEEE 802.3bt

Power Sourced  
90W

Power Requested  
71.3W



PTZ Camera




PTZ Controller



Smart Lighting



Digital Signage




POS System

## Time-Saving. Effort-Saving.

### PRRT (PD Remote Reset Technology)


Enabling PRRT function can save you hours, miles and lots of efforts. With simply pull and plug on fiber cable of networking device connected with BT PoE product in the near field site, remote PSE system can be rebooted to reset remote PD devices

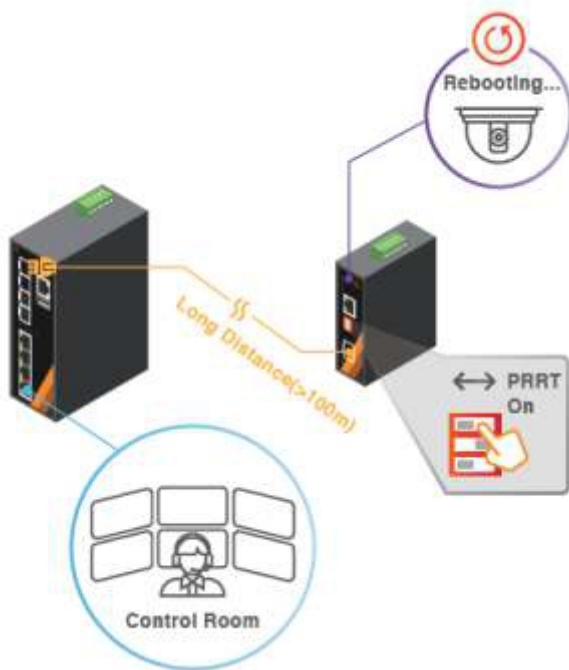

## Persistent PoE

PD devices are connected to collect important data for a wide array of crucial applications, such as video surveillance, to guarantee personal and property safety. It is one of the most users' concerns when it comes to PD devices shut -down in a key moment.


Wavesys' s Persistent PoE provides uninterrupted power delivery to PD devices even when the firmware is being upgraded, ensuring PD devices smooth operation with no worry.

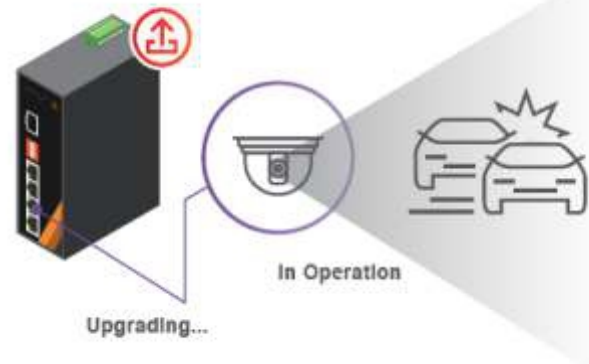

## Prevent Electric Spark Risk

### Safe PoE Disable

High power PoE (802.3bt) accompanies the risk of electric spark. Safe PoE Disable design allows users to safely unplug the copper cable, ensuring zero electric spark danger and prevent fire hazard.

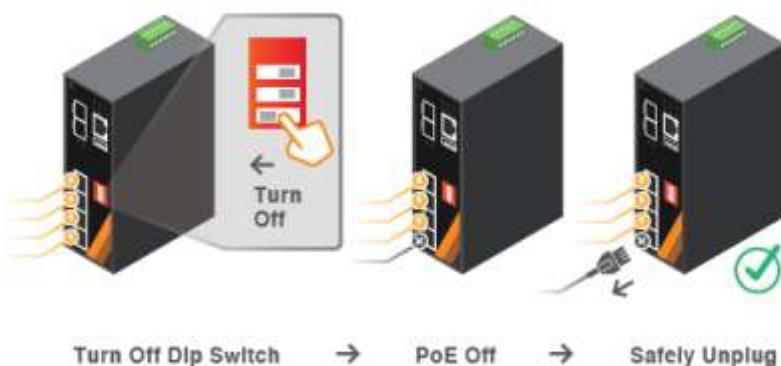

## Responsive PoE Management

Users are able to manage the PoE devices according to different operating status with both hardware and software reminders thoroughly.


- PoE Budget
- Ping Alive
- PoE Schedule
- Event Indicator
- PoE Loading



Follow us on



## USB Backup/Restore Function

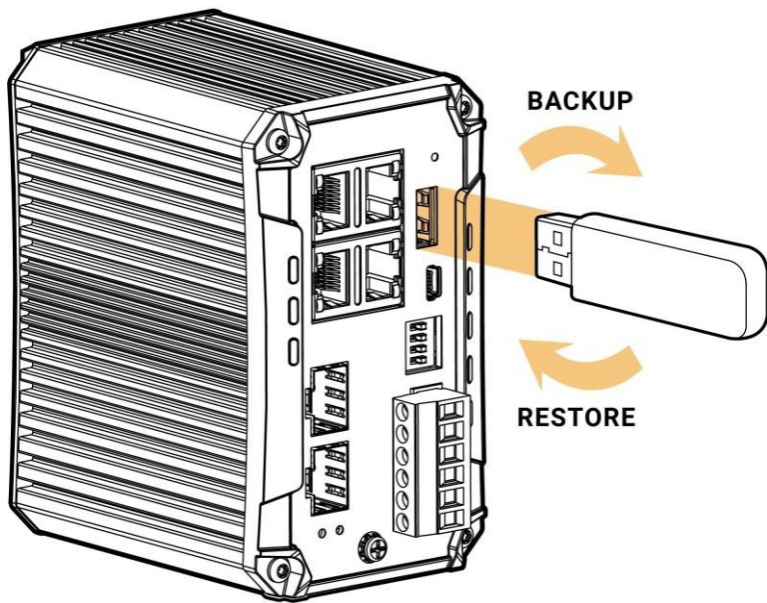

Wavesys's Managed Ethernet switch series supports USB 2.0 flash drive, which allows user to backup and restore the device configuration to meet the need of quick device swap. And USB port on Managed Ethernet switch series is applicable to the most common USB flash drives, hugely elevating convenience for user.

Follow us on

